SCOPE LINK
BARCODE TECHNOLOGIES
https://www.scopelink.com.au

UROVO
mobility redefined

i6310TGW Enterprise Mobile Computer

The thinnest rugged PDA in the world

High performance

Android 8.1 Support
Qualcomm Octa-Core 1.4GHz

Fast data connectivity

802.11 a/b/g/n/ac WiFi
2G/3G/4G celullar radio
Bluetooth 4.2

Powerful data collection

2D scan engine
13MP rear camera and 2MP/5MP(Optional) front camera

Highly optimized power system

3.8V, 4100mAh battery ensures long operation hours
Pogo pin design for simple and non-intrusive charging

Industrial reliability

Stylish, modern look and feel
IP65 rating

Gun Grip

Cradle Assembly

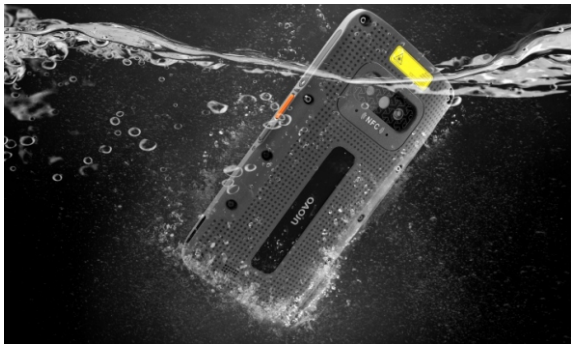

SERIES

i6310TGW SPECIFICATIONS CHART

Basic Characteristics

O.S	Safedroid OS (Based on Android 8.1)
CPU	Qualcomm Octa-Core 1.4GHz
Display	5.0 inch TFT-LCD (720 x 1280) color screen
RAM	2GB/4GB
ROM	16GB/64GB
Dimensions	158mm x 76.2 mm x 12.6mm
Weight	210g (Battery included)
Buttons	Volume up/down,Power button,Custom buttons x 3
Input	Chinese/English,and supports handwriting and soft keyboard
Barcode Scanner	2D CMOS
Main Battery	Rechargeable 3.8V 4100mAhlithium polymer batterry pack(Typical Operation time ⩾8 hours)
RTC Battery	Real time clock battery

Radio Communication

Wi-Fi		802.11 a/b/g/n/ac wireless communication
Bluetooth		BT 4.2 + BR/EDR + BLE
WWAN	4G	TDD-LTE (B38/B39/B40/B41) FDD-LTE (B1/B2/B3/B4/B5/B7/B8/B20/B28A/B28B)
	3G	UMTS/HSDPA/HSPA/HSPA+ (B1/B2/B5/B8) CDMA EV-DO Rev.A BC0(800MHz) TD-SCDMA(B34/B39)
	2G	CDMA 1x GSM/EDGE/GPRS (850/900/1800/1900MHz)

Expansion and peripherals

Camera	Rear camera:13MP, support flash, autofocus and video recording Front camera:2MP, fixed-focus 5MP(Optional)
RFID	Supports 13.56Mhz, ISO14443A&B and ISO15693 standard ,Supports NFC
GPS	GPS,A-GPS, Bei-Dou satellite navigation system,GLONASS
Sensor	Standard:light sensor and acceleration sensor Optional:Compass,gyroscope,altimeter
Slot	Micro SD/TF×1 ,Micro SIM × 2
Interfaces	Type-C USB,3.5mm Audio port,POGO PIN
Audio	Loadspeaker, Microphone, Earpiece
Standard	Power adaptor, Data cable, One battery
Optional	Cradle, Dimension measuring sensor, Pistol grip, Rugged boot

User Environment

Operating Temperature	-10~50℃
Storage Temperature	-20~70℃
Humidity	5% ~ 95%
Drop Durability	1.5m
IP	65

urovo® mobility redefined

SCOPE LINK - BARCODE TECHNOLOGIES
Website: https://www.scopelink.com.au | Tel: +61 28006 6644
eMail: info@scopelink.com.au

This page is subject to change without prior notice, subject to change without notice